



أصباغ الخليج
GULF PAINTS

ROCSHIELD TEXTURE

SHIELDED TEXTURE COLLECTION



The Signature of Excellence

An elegant and attractive textured coating with excellent hardness and weather resistance, ensuring long-lasting, beautiful walls.

Why Choose ROCSHIELD?



Easy to use



High resistance to UV & weather conditions



High resistance to moisture



High resistance to temperature, Dust & Dirt


Description

A high-performance decorative coating system for interior and exterior surfaces, featuring a *ROC textured* layer with a Dry Film Thickness of 1.7 mm, 2.0 mm, or 3.0 mm, protected by a Gulf Shield topcoat.

The *ROC texture* provides excellent mechanical strength and decorative versatility, while the *Gulf Shield* enhances moisture resistance, UV stability, color retention, and surface durability, ensuring long-lasting protection and a refined finish.

Key Features:

- High resistance to moisture, weather, and temperature variations
- Excellent scratch and abrasion resistance
- Smooth, controlled texture with multiple design options
- Superior UV resistance and long-term color stability
- Easy maintenance with enhanced surface protection

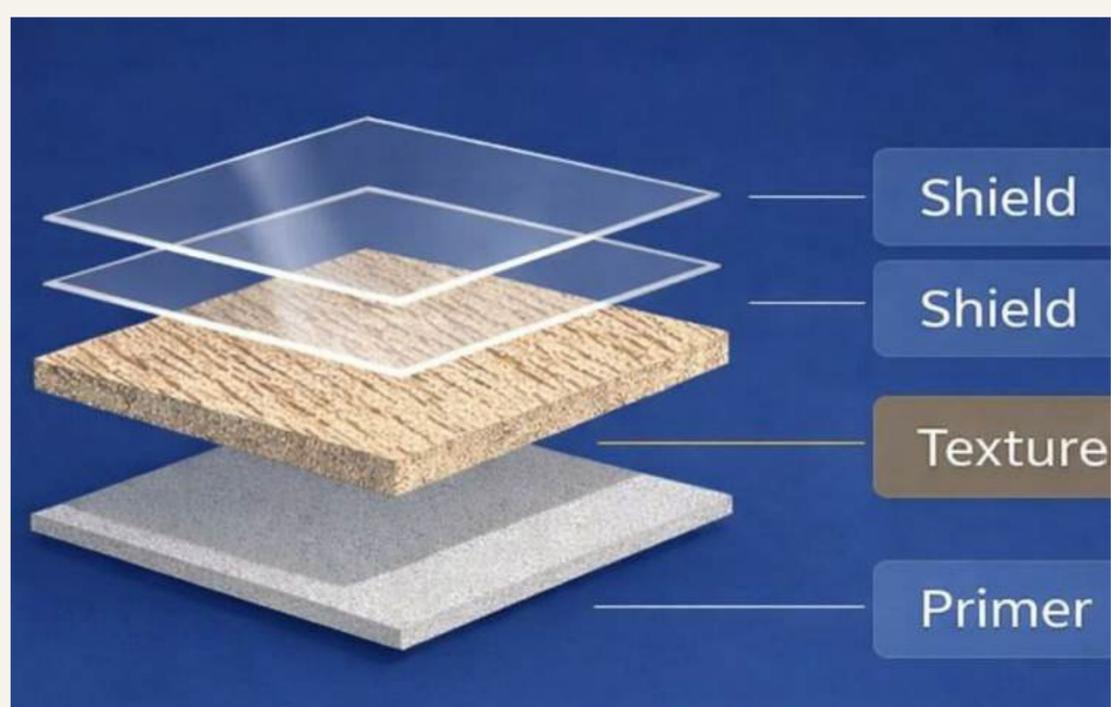



TRACE TEXTURE

Inspired by nature's organic lines, Trace Texture offers a calm, flowing surface that brings warmth, texture, and durability to exterior designs.



Trace Texture

SHIELDING YOUR FACADE FOR YEARS TO COME.



Surface with meaning



Recommended use:

Recommended for exterior and interior applications on concrete, cement, and brick surfaces in educational, residential, commercial, and industrial buildings.

Method of Application:

Surface Preparation

Ensure the surface is clean, dry, and sound.

Primer Coat

Apply one coat of Falco Acrylic Primer.

Texture Coat

Apply one coat of Falco ROC (1.7 mm, 2.0 mm, or 3.0 mm).

Shield Protection

Apply two coats of Gulf Shield.

Painting System

- Apply one coat of *Falco Acrylic Emulsion Primer* by brush or roller, thinned with 10–15% fresh water. Allow to dry for 2 hours.
- Apply one coat of Falco Roc by trowel, thinned with 10–15% fresh water. Allow it to dry for a minimum of 4 hours.
- Apply two coats of *Gulf Shield (Silk Matt/ Semi Gloss or Gloss)* by brush, roller, or spray, each coat thinned with 10–15% fresh water. Allow 6 hours drying time between coats.



FACADE PROTECTION SYSTEM

Beauty. Strength. Long-Lasting Performance.

Primer Coat

One Coat – High Adhesion Primer

Trace Texture Coat

Water-Based Decorative Texture

Gulf Shield Protective Coats

Two Coats – Matt | Semi-Gloss | Gloss

🛡️ Advanced Protection Benefits:

- UV resistant – prevents fading
- Water repellent – protects from rain damage
- Dirt & stain resistant – easy maintenance
- Crack resistance support
- Long-lasting color retention



**ROC
TEXTURE**


**MEZARIO
TEXTURE**



Mezario Texture



ROC Texture

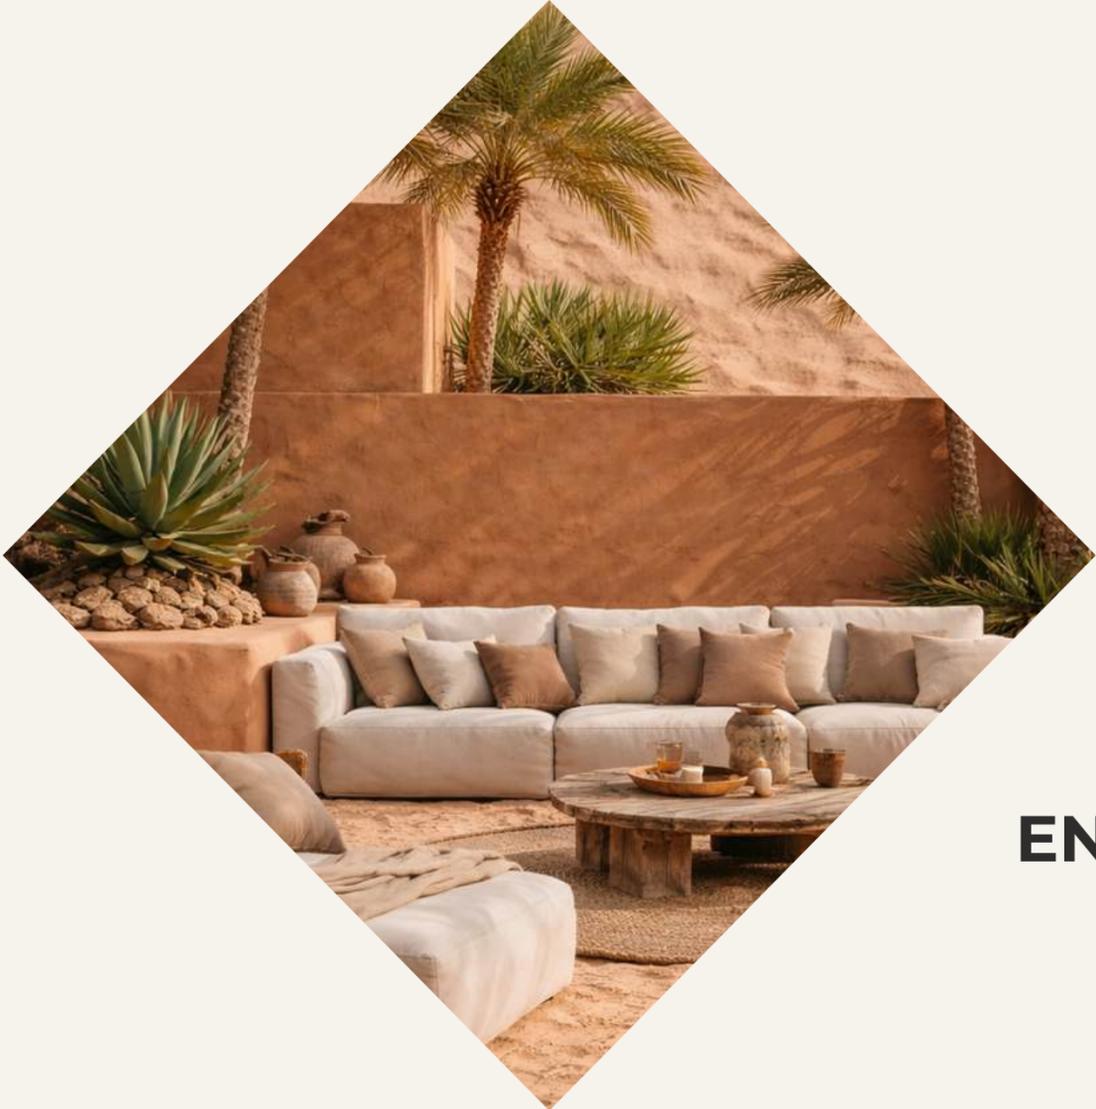

ENDLESS TEXTURES



**DESIGNED FOR
MODERN LIVING**



WORLD OF COLORS

ROCSHIELD TEXTURES

Signature Architectural Finishes



أصباغ الخليج
GULF PAINTS

www.gulfpaints.com



Scan for more

AL AIN - Main Office:

Tel No : +971 3 7212888
Fax No: +971 3 7210044
P.O. Box: 15381 Al Ain, UAE.
E-mail: alain@gulfpaints.com

ABU DHABI :

Tel No : +971 2 6734567
Fax No: +971 2 6733430
P.O. Box: 8013 Abu Dhabi, U.A.E.
E-mail: abudhabi@gulfpaints.com

SHARJAH :

Tel No : +971 6 5584071
Fax No: +971 6 5584072
P.O. Box: 22403 Sharjah, U.A.E.
E-mail: dubai@gulfpaints.com